



LEVEL TOP SP

Self-Leveling, Stainable, Polishable Overlay

Stain in 4 Hours!
Polish in 24!

Stainable
Stain in 4 hours.

Polishable
Polish in 24 hours.

High Strength
Cures at 5,000 psi.

Versatile
*Ideal as a topping,
resurfacer, or
underlayment.*

IDEAL APPLICATIONS:

- Retail/Commercial Flooring
- Warehouse Aisleways
- Office & Medical Facilities
- School/Institutional Floors
- Restaurants • Hotels
- Malls • Arcades



Decorative Concrete
Technology

A Division of The Euclid Chemical Company

Level Top SP

Self-Leveling, Stainable, Polishable Overlayment

RESTORE - RENEW OLD INTERIOR CONCRETE

INCRETE
SYSTEMS

SURFACE PREPARATION

Concrete surfaces must be structurally sound, free of loose and deteriorated concrete and free of dust, dirt, paint, efflorescence, oil and all other contaminants. Mechanically abrade the surface to achieve a surface profile equal to CSP 3 - 5 in accordance with ICRI Guideline 310.2. Properly clean profiled area. Any animal or petroleum contaminants should be removed with Increte's *Grease-A-Way*.

Before installing *Level Top SP*, all concrete substrates must be primed with two coats of Increte Systems' *Bond-Crete* primer. Alternately, the concrete can be primed with Increte HP EPOXY and broadcast to refusal with clean and dry silica sand. Once the epoxy has dried, remove excess silica sand.

Do not apply when ambient or surface temperature is above 90°F or below 50°F. Optimum temperature for installation is 70°F.

INCRETE
SYSTEMS

APPLICATION PROCESS

1. Add one 50-pound bag of *LEVEL TOP SP* to 5 quarts of cool water. May add an additional pint as needed.
2. Mix in a clean damp paddle mixer (mortar mixer) or using a drill and paddle mixer.
3. Mix for a minimum of 3 minutes adjust water by adding up to 2 pints as required. When using integral colorants, add colorant to water prior to the addition of powder.
4. Pour *LEVEL TOP SP* directly onto surface and spread.
5. Since projects produce varying requirements, it is recommended that a test be made to best determine the appropriate gauge rake setting for the application thickness. *LEVEL TOP SP* may be applied up to 1 inch thick as is. For pours greater than 1 inch use with extender aggregates. *LEVEL TOP SP* may also be used as an excellent patch/repair compound.

INCRETE
SYSTEMS

PACKAGING/COVERAGE


LEVEL TOP SP is packaged in 50 lb bags. A single bag will cover approximately 40 ft² at 1/8 in., 20 ft² at 1/4 in.

INCRETE
SYSTEMS

STAINING/SEALING/POLISHING

After placement and the *LEVEL TOP SP* surface has cured for four hours, one or more of Increte Systems' stains or dyes may be applied. (For deeper, richer colors acid wash or sand the surface prior to application of stains and dyes). For maximum durability and wear resistance apply Increte System Clear Seal, High Performance Epoxy, or Urethanes. Maintain the surface with Increte Systems HIGH GLOSS WAX. The resulting surface will be a unique decorative floor.

LEVEL TOP SP may also be chemically hardened with Increte Pro-Polish Densifiers and polished to a high gloss finish. Use Pro-Polish Guard to protect your polished floors.

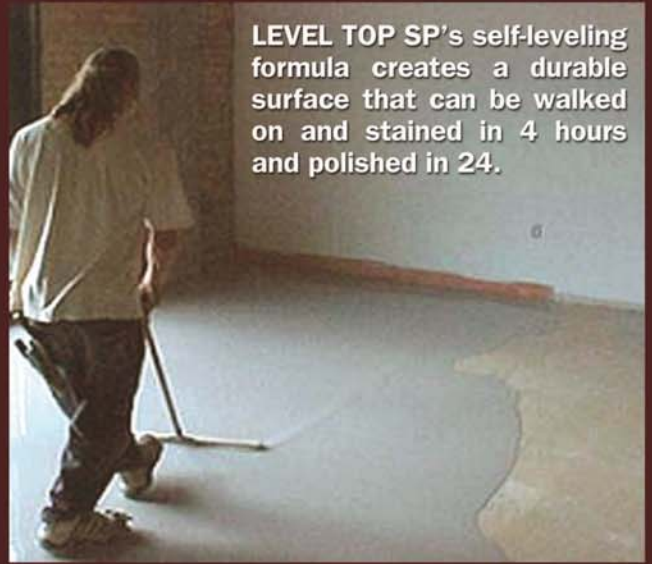

LEVEL TOP SP's self-leveling formula creates a durable surface that can be walked on and stained in 4 hours and polished in 24.

Your One-Stop-Shop for Decorative Concrete!

INCRETE
SYSTEMS

Chemicals - Tools - Training - Systems

INCRETE
SYSTEMS

Decorative Concrete
Technology

A Division of The Euclid Chemical Company

1611 Gunn Hwy.
Odessa, FL 33556
813.886.8811
800.752.4626
www.increte.com

Local Distributor: